
Oakmont Wide Spread Two Handle Lavatory Faucet

Specifications

| Handle | Zinc handle, 1/4 quarter turn stop | | | | |
|--------------------|------------------------------------|--|--|--|--|
| Spout | Brass | | | | |
| Cartridge | Ceramic cartridge | | | | |
| Рорир | Brass popup included | | | | |
| Waterway | Hybrid | | | | |
| Hose | Quick installation hose | | | | |
| Max Waterflow | 1.5 GPM@ 60 PSI | | | | |
| Spout Reach | 5 11/16" | | | | |
| Spout Height | 4 15/16" | | | | |
| Mouting Holes | 3 | | | | |
| Mouting Center | 8" | | | | |
| Max Deck Thickness | 1 3/16" | | | | |
| Dimensione | | | | | |



Dimensions

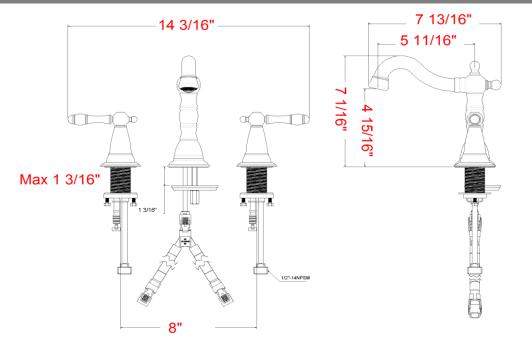

Warranty & Compliances

| Warranty | Lifetime Limited Warranty, L | ifetime Limite | ed Finish Warranty | | NSF / ANSI 61 | | | | | |
|---|---|------------------|--------------------|----------|---------------|---|------------|----|--|--|
| IAPMO/UPC | CUPC compliant | TINISA | | | UPC | đ | MaterSense | | | |
| ASME | ASME A112.18.1/ CSA B125 | 5.1 | Earra Mt | LIFETIME | C R | | Erner to | ۍ. | | |
| NSF/ANSI | NSF/ANSI 61 | | | | 0 • 0 | | | | | |
| Lead Free | Fed. P.L. 111-380 (1/2014) | | | | | | | | | |
| WaterSense [®] | Compliance with EPA WaterSense® High Efficiency Lavatory Faucet Specification . | | | | | | | | | |
| ADA | Compliant | | | | | | | | | |
| Order Codes & Finishes/Colors | | | | | | | | | | |
| Oil Rubbed Bronze (I Satin Nickel (US15) | JS10B) | 523324 523316 | TRU (TRUCT) | | | | | | | |

Design House reserves the right to make changes in materials, specifications & models at any time. Design House also reserves the right to discontinue product without notice or obligation.

