SCROLL Entry Lever



Specifications

Latch Type	2-Way Latch & Universal Latch available
Door Prep	Cross bore 2-1/8" dia (54mm). Edge bore 1" dia (25mm)
Backset	Adjustable to 2-3/8" or 2-3/4"
Door Thickness	1-3/8" - 1-3/4" door standard
Cylinder	5-pin High Security - removable core
Faceplate	1" x 2-1/4" radius corner. (Square and drive-in also available on Universal)
Strike	Standard radius corner . Other options available.
Latch Bolt	Full 1/2" throw. Nickel plated.
Door Handing	Non-handed. Reversible for Left or Right hand doors.



1"

O

<u>72()</u>


2-1/4"

Keyway Keyed Alike

KA4 - 4 entries keyed alike

KW1

Dimensions

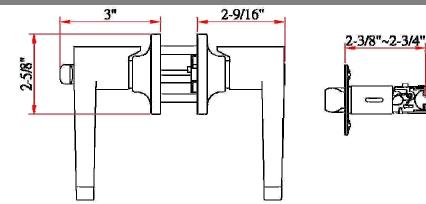

Warranty & Compliances

Warranty	Limited Lifetime Mechanic	al / 5 year Finish	Heele		TINISA	
ANSI/BHMA	Meets ANSI Grade 3 specification		GRA Decifi	DE 3 LIFETIME	YEAR	
ADA	N/A				Ŭ	
UL	N/A					
Order Codes						
Box Pack	2W	Universal				
Satin Nickel (US15)	784918	740332	TRU			
Polished Brass (US3)	784892	741033	TRU			
Oil Rubbed Bronze (US	10B) 791640	740340	TRU			
Antique Brass (US5)	755090	755132	TRU			
PVD Brass	784942	740324	TRUCOMATCH			
View Pack				Туре:		
Satin Nickel (US15)	784876		TRU	Job:		
Polished Brass (US3)	784868	754796	TRU	Order Code:		
Oil Rubbed Bronze (US	10B) 750711		TRU	Approvals:		
Antique Brass (US5)	755041		TRU			
PVD Brass	784884					

Design House reserves the right to make changes in materials, specifications & models at any time. Design House also reserves the right to discontinue product without notice or obligation.