



2010SS

89mm x 25mm
3 1/2" x 1"




MAIN FEATURES

- #304 stainless steel and Nylon
- Suitable for doors of 31mm min. thickness
- Load capacity 132 lbs. (60 kg.)
- Easy installation with symmetrical mortising for door and frame
- Tested for minimum 200,000 opening / closing cycles.
- Perfect for nautical applications
- Manufactured in Italy

Color	Item	Description
	C2010SS	Invisible Hinge 89 x 25mm Stainless Steel



MODEL	TECHNOLOGY	MATERIAL	DIMENSION L - W - D mm / Inches	MINIMUM DOOR THICKNESS mm / Inches	RANGE OF REVERSIBILITY mm / Inches	LOAD CAPACITY kg / lbs	
						2 hinge	3 hinge
2010SS	Concealed Hinge	Stainless Steel / Nylon	89 x 25 x 27.3mm 3 1/2" x 1" x 1 1/16"	31mm 1 1/4"	31 - 33mm 1 1/4" - 1 5/16"	40 kg 88 lbs	60 kg 132 lbs

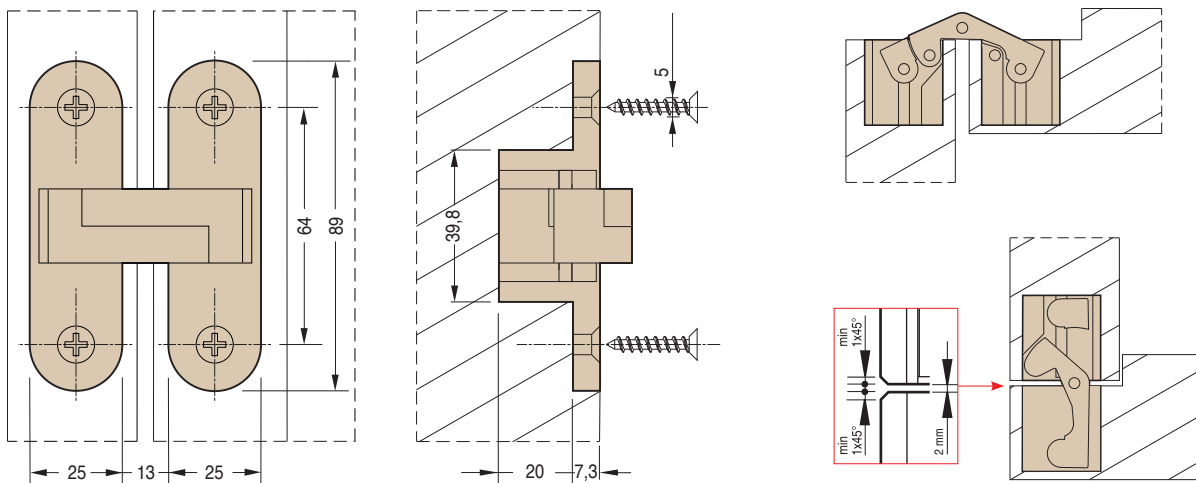

Note: Manufacturing tolerance are based on metric dimensions.
Fractions are for reference only.

