



# Solo

12VDC PUCK LIGHTING



94 Lumens


A spotlight worthy of a SOLO performance. The unique shallow rim mounts flush to create a seamless transition from light to the surrounding surface. Revolutionary CSR (Center Spot Reduction) optics eliminate glare making it visually appealing whether turned on or off.



► Center spot reduction



► Thin profile

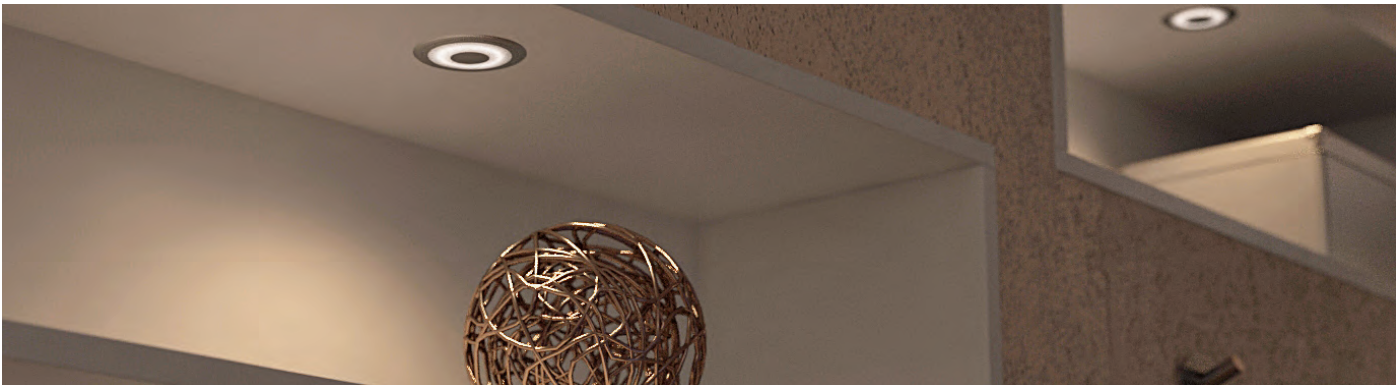

#### Features:

- Slim profile
- Recessed installation
- Detachable starter cord
- Center Spot Reduction technology
- Commercial grade 3-year warranty



#### Typical Applications:

- Kiosks
- Shelves
- Displays or store fixtures
- Cabinets
- Soffits

#### Available Finishes:



Nickel (NI)



Black (BL)


**Dimensions:**

Actual Size

Front


**Specifications:**

Wattage	2W
Lumens	94
Efficacy (lm/W)	47
Input Voltage	12 VDC
Diode Life	20,000 Hours
Max Per 60W Power Supply	30
Mounting	Recess
Warranty	3 Year
Certifications	

**Beam Angle****Photometric Data**

	Height	Light Output	Beam Area
	1ft (.3 m)	35.90Fc (386.4lx)	2.7ft (.8 m)
	3ft (.9 m)	3.99Fc (42.9lx)	8ft (2.4m)
	6ft (1.8 m)	1Fc (10.7lx)	16ft (4.8m)

L-HS0L0-CBL Tested

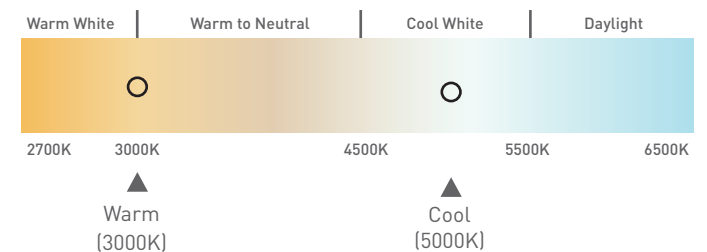**Color Temperature**


IES data verified by Underwriters Laboratory

Required Items

Solo

Part #	Description
L-HSOLO-WNI-1	12VDC 2W Solo, 3000K, Nickel
L-HSOLO-CNI-1	12VDC 2W Solo, 5000K, Nickel
L-HSOLO-WBL-1	12VDC 2W Solo, 3000K, Black
L-HSOLO-CBL-1	12VDC 2W Solo, 5000K, Black

20,00 useful life hours.  
2-1/8" (54 mm) hole required for recessed mounting.  
Includes starter cord 79" (2 m) and AMP connector with each light

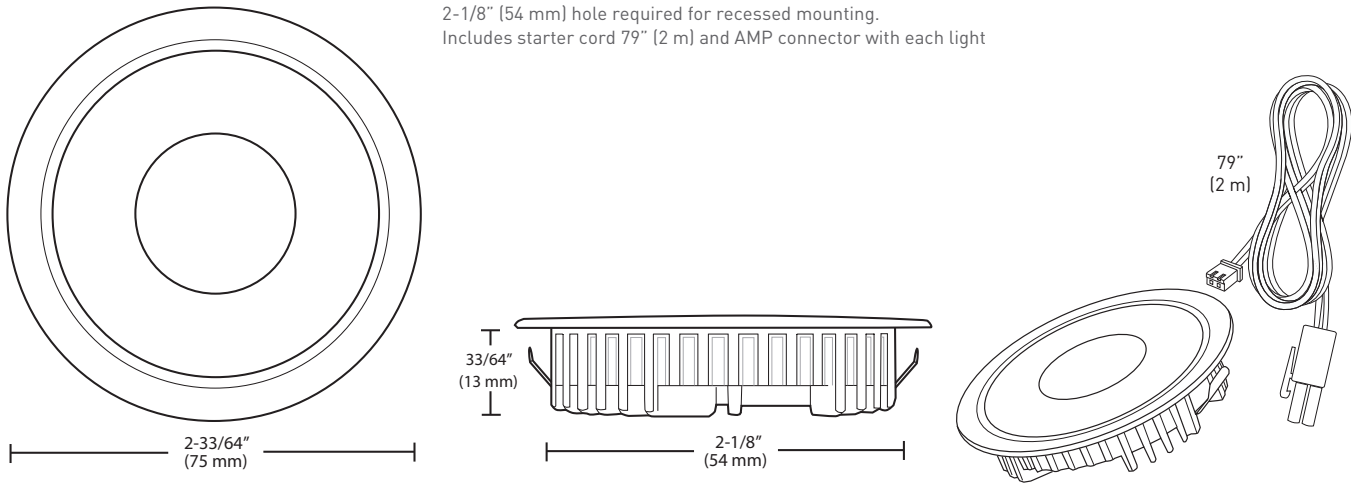

Power Supplies



Part #	Description
L-DC-ELT12-CON-1	12W 12VDC Power Supply w/6 Snap Mounting Block*
L-DC-ELT18-CON-1	18W 12VDC Power Supply w/6 Snap Mounting Block*
L-DC-ELT60-CON-1	60W 12VDC Power Supply w/6 Snap Mounting Block*
L-DC-ELT6WP-CON-1	6W 12VDC Wall Mount Power Supply w/3 Snap Block*
L-DC-ELT15WP-CON-1	15W 12VDC Wall Mount Power Supply w/6 Snap Block*
L-DCE12D-CON-1	12VDC 12W Dimmable LED Power Supply
L-DCE50D-CON-1	12VDC 50W Dimmable LED Power Supply

\* Dimmable on trailing edge (12V side). Mounting block and power cord are included.