


# Swing

12VDC PUCK LIGHTING



126 Lumens

Create a standout design with the lowest 360 degree swiveling puck light on the market. The innovative, interchangeable ball and socket design give you incomparable versatility. The built-in glare eliminating CSR (Center Spot Reduction) technology creates a visually appealing fixture whether switched on or off.

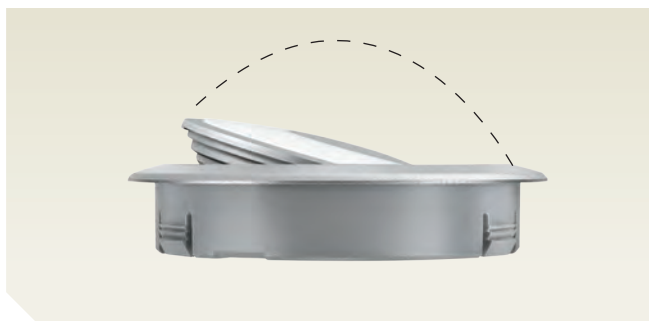

► 15° pivoting face in any direction



► Surface mount ring included



## Features:

- Slim profile
  - Recessed installation
  - Detachable starter cord
  - Center Spot Reduction technology
- Commercial grade 3-year warranty



## Typical Applications:

- Kiosks
- Shelves
- Displays or store fixtures
- Cabinets
- Soffits

## Available Finishes:



Nickel (NI)



Black (BL)



## Dimensions:

Actual Size

Front



3-5/64"  
(78 mm)

79"  
(2 m)

Side



1/2"  
(13 mm)  
Recessed  
Depth

15°  
pivoting face

Surface Mount Ring




11/16"  
(17.5 mm)

## Specifications:

Wattage	2.5W
Lumens	126
Efficacy (lm/W)	50
Input Voltage	12 VDC
Diode Life	30,000 Hours
Max Per 60W Power Supply	24
Max Continuous Run	NA
Mounting	Recess/Surface
Warranty	3 Year
Certifications	


## Beam Angle



## Photometric Data

	Height	Light Output	Beam Area
	1ft (.3 m)	50.40Fc (540.5lx)	2.4ft (.7m)
	3ft (.9 m)	5.60Fc (60.2lx)	7.3ft (2.2m)
	6ft (1.8 m)	1.40Fc (15lx)	14.6ft (4.4m)
L-HSWING-CNI Tested			

## Color Temperature

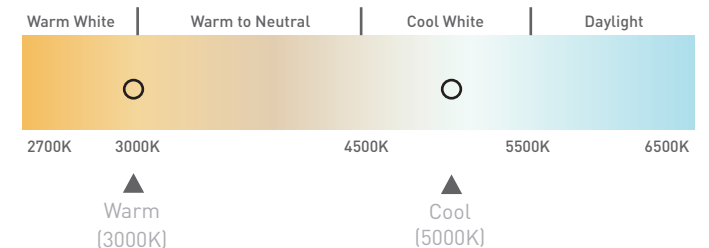

IES data verified by Underwriters Laboratory

## Required Items

## Swing




Part #	Description
L-HSWNG-WNI-1	12VDC 2.5W Swing, 3000K, Nickel
L-HSWNG-CNI-1	12VDC 2.5W Swing, 5000K, Nickel
L-HSWNG-WBL-1	12VDC 2.5W Swing, 3000K, Black
L-HSWNG-CBL-1	12VDC 2.5W Swing, 5000K, Black

30,000 useful life hours.

2-11/16" (73 mm) hole required for recessed mounting.

Surface mount ring is included with each light.

Includes starter cord 79" (2 m) and AMP connector with each light.

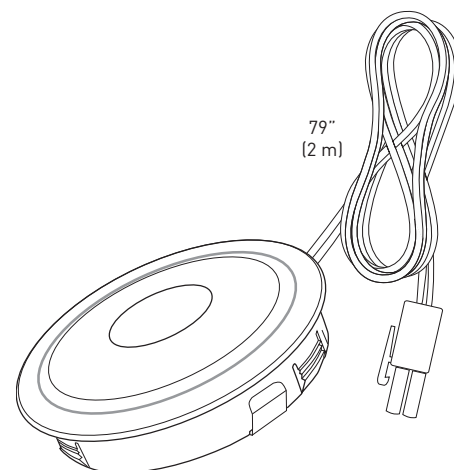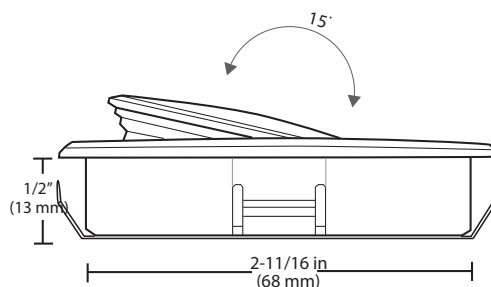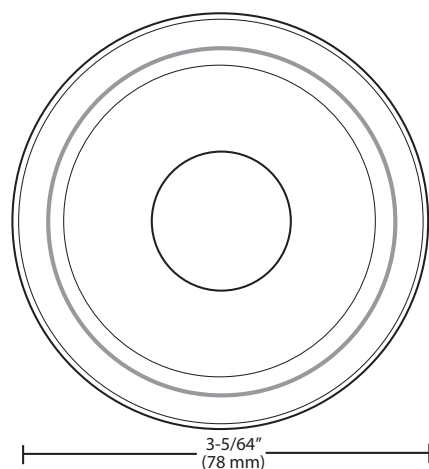

## Power Supplies



For details see  
Power Supplies on  
Page 135.

Part #	Description
L-DC-ELT12-CON-1	12W 12VDC Power Supply w/6 Snap Mounting Block*
L-DC-ELT18-CON-1	18W 12VDC Power Supply w/6 Snap Mounting Block*
L-DC-ELT60-CON-1	60W 12VDC Power Supply w/6 Snap Mounting Block*
L-DC-ELT6WP-CON-1	6W 12VDC Wall Mount Power Supply w/3 Snap Block*
L-DC-ELT15WP-CON-1	15W 12VDC Wall Mount Power Supply w/6 Snap Block*
L-DCE12D-CON-1	12VDC 12W Dimmable LED Power Supply
L-DCE50D-CON-1	12VDC 50W Dimmable LED Power Supply

\* Dimmable on trailing edge (12V side). Mounting block and power cord are included.