



Power Pocket® 3W

12VDC PUCK LIGHTING




243 Lumens



The Power Pockit® 3W is a versatile choice offering flood and task lighting that can be used for interior cabinets, under cabinets and store displays. This 3W energy efficient LED provides a crisp, uniform wash over illuminated objects at a fraction of the price of halogen.



► Available in multiple finishes

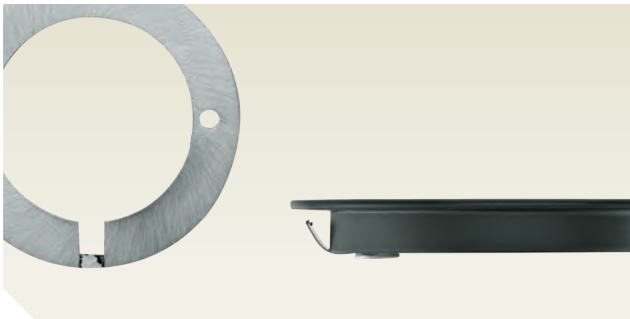

► Thin profile: Just 1/4" (6 mm) depth when recessing
3/8" (9.5 mm) when surface mounting



► Frosted diffuser lens provides even illumination

Features:




- Wide 120° beam spread
- Surface mount ring included
- High output (126 lumens), exceeds 20W Xenon Puck
- Luniform output - no "dots"
- Dimmable
- Commercial grade 3-year warranty

Typical Applications:

- Displays
- Store fixtures
- Interior/under cabinets
- Task lighting

Available Finishes:




**Dimensions:**

Actual Size


**Specifications:**

Wattage	3W
Lumens	234
Efficacy (lm/W)	78
Input Voltage	12VDC
Diode Life	50,000 Hours
Max Per 60W Power Supply	20 Fixtures
Max Continuous Run	N/A
Mounting	Recess/Surface
Warranty	3 Year
Certifications	

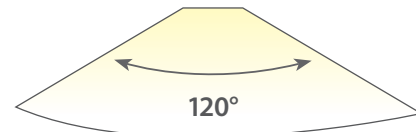Beam Angle**Photometric Data**

	Height	Light Output	Beam Area
	1ft (.3 m)	81.30Fc (875.1lx)	3.1ft L x 3.1ft W (1 m L x 1 m W)
	3ft (.9 m)	9.03Fc (97.2lx)	9.2ft L x 9.2ft W (2.8 m L x 2.8 m W)
	6ft (1.8 m)	2.26Fc (24.3lx)	18.4ft L x 18.4ft W (5.6 m L x 5.6 m W)


L-P0C-3LEDSFR-C Tested

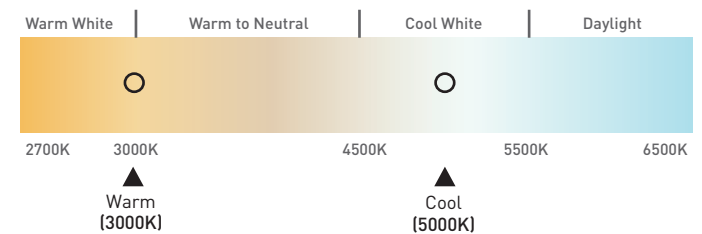Color Temperature

IES data verified by Intertek testing lab.

Required Items

3W Power Pockit®

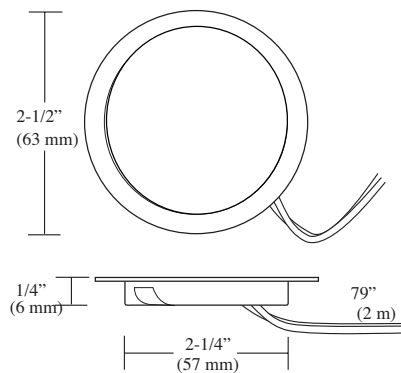

Part

Description

L-POC-3LEDSFR-CAB-1	3W 5000K Antique Brass LED Pockit® Light
L-POC-3LEDSFR-CBL-1	3W 5000K Black LED Pockit® Light
L-POC-3LEDSFR-CCH-1	3W 5000K Chrome LED Pockit® Light
L-POC-3LEDSFR-CNI-1	3W 5000K Nickel LED Pockit® Light
L-POC-3LEDSFR-CWH-1	3W 5000K White LED Pockit® Light
L-POC-3LEDSFR-WAB-1	3W 3000K Antique Brass LED Pockit® Light
L-POC-3LEDSFR-WBL-1	3W 3000K Black LED Pockit® Light
L-POC-3LEDSFR-WCH-1	3W 3000K Chrome LED Pockit® Light
L-POC-3LEDSFR-WNI-1	3W 3000K Nickel LED Pockit® Light
L-POC-3LEDSFR-WORB-1	3W 3000K Oil-Rubbed Bronze LED Pockit® Light
L-POC-3LEDSFR-WWH-1	3W 3000K White LED Pockit® Light


50,000 useful hours.

57 mm [2-1/4"] hole required for recessed mounting.

Power Pockit® includes Surface Mount Ring, AMP® Connector, and 79" [2 m] of input lead.

All Pockit® lights can be either surface mounted or recess mounted.

Surface Mount Ring

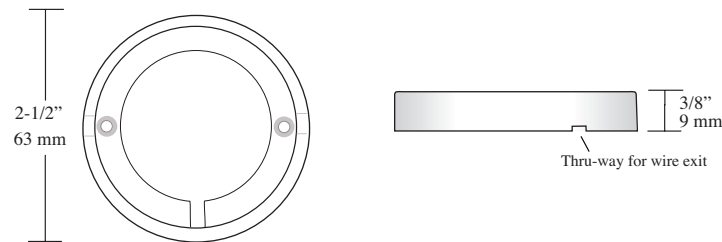

Surface Mount Ring is included with each light.

Power Supplies



Part

Description

L-DC-ELT12-CON-1	12W 12VDC Power Supply w/6 Snap Mounting Block*
L-DC-ELT18-CON-1	18W 12VDC Power Supply w/6 Snap Mounting Block*
L-DC-ELT60-CON-1	60W 12VDC Power Supply w/6 Snap Mounting Block*
L-DC-ELT6WP-CON-1	6W 12VDC Wall Mount Power Supply w/3 Snap Block*
L-DC-ELT15WP-CON-1	15W 12VDC Wall Mount Power Supply w/6 Snap Block*
L-DCE12D-CON-1	12VDC 12W Dimmable LED Power Supply
L-DCE50D-CON-1	12VDC 50W Dimmable LED Power Supply

* Dimmable on trailing edge (12V side). Mounting block and power cord are included.